



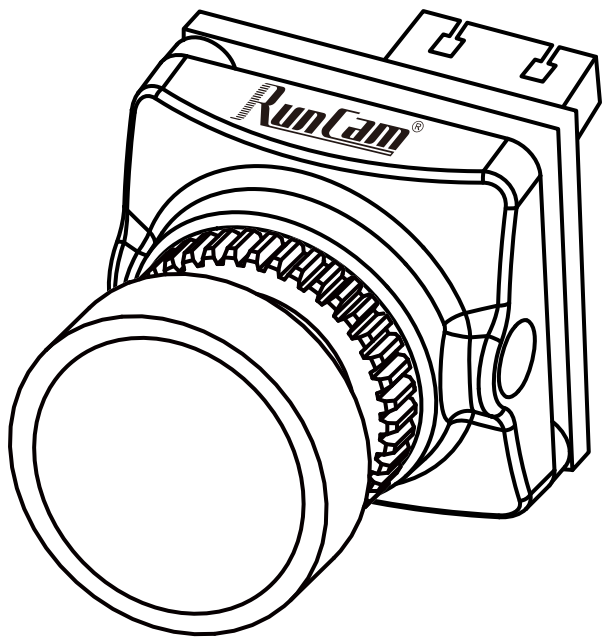


RunCam Phoenix 2

USER MANUAL

Joystick Control

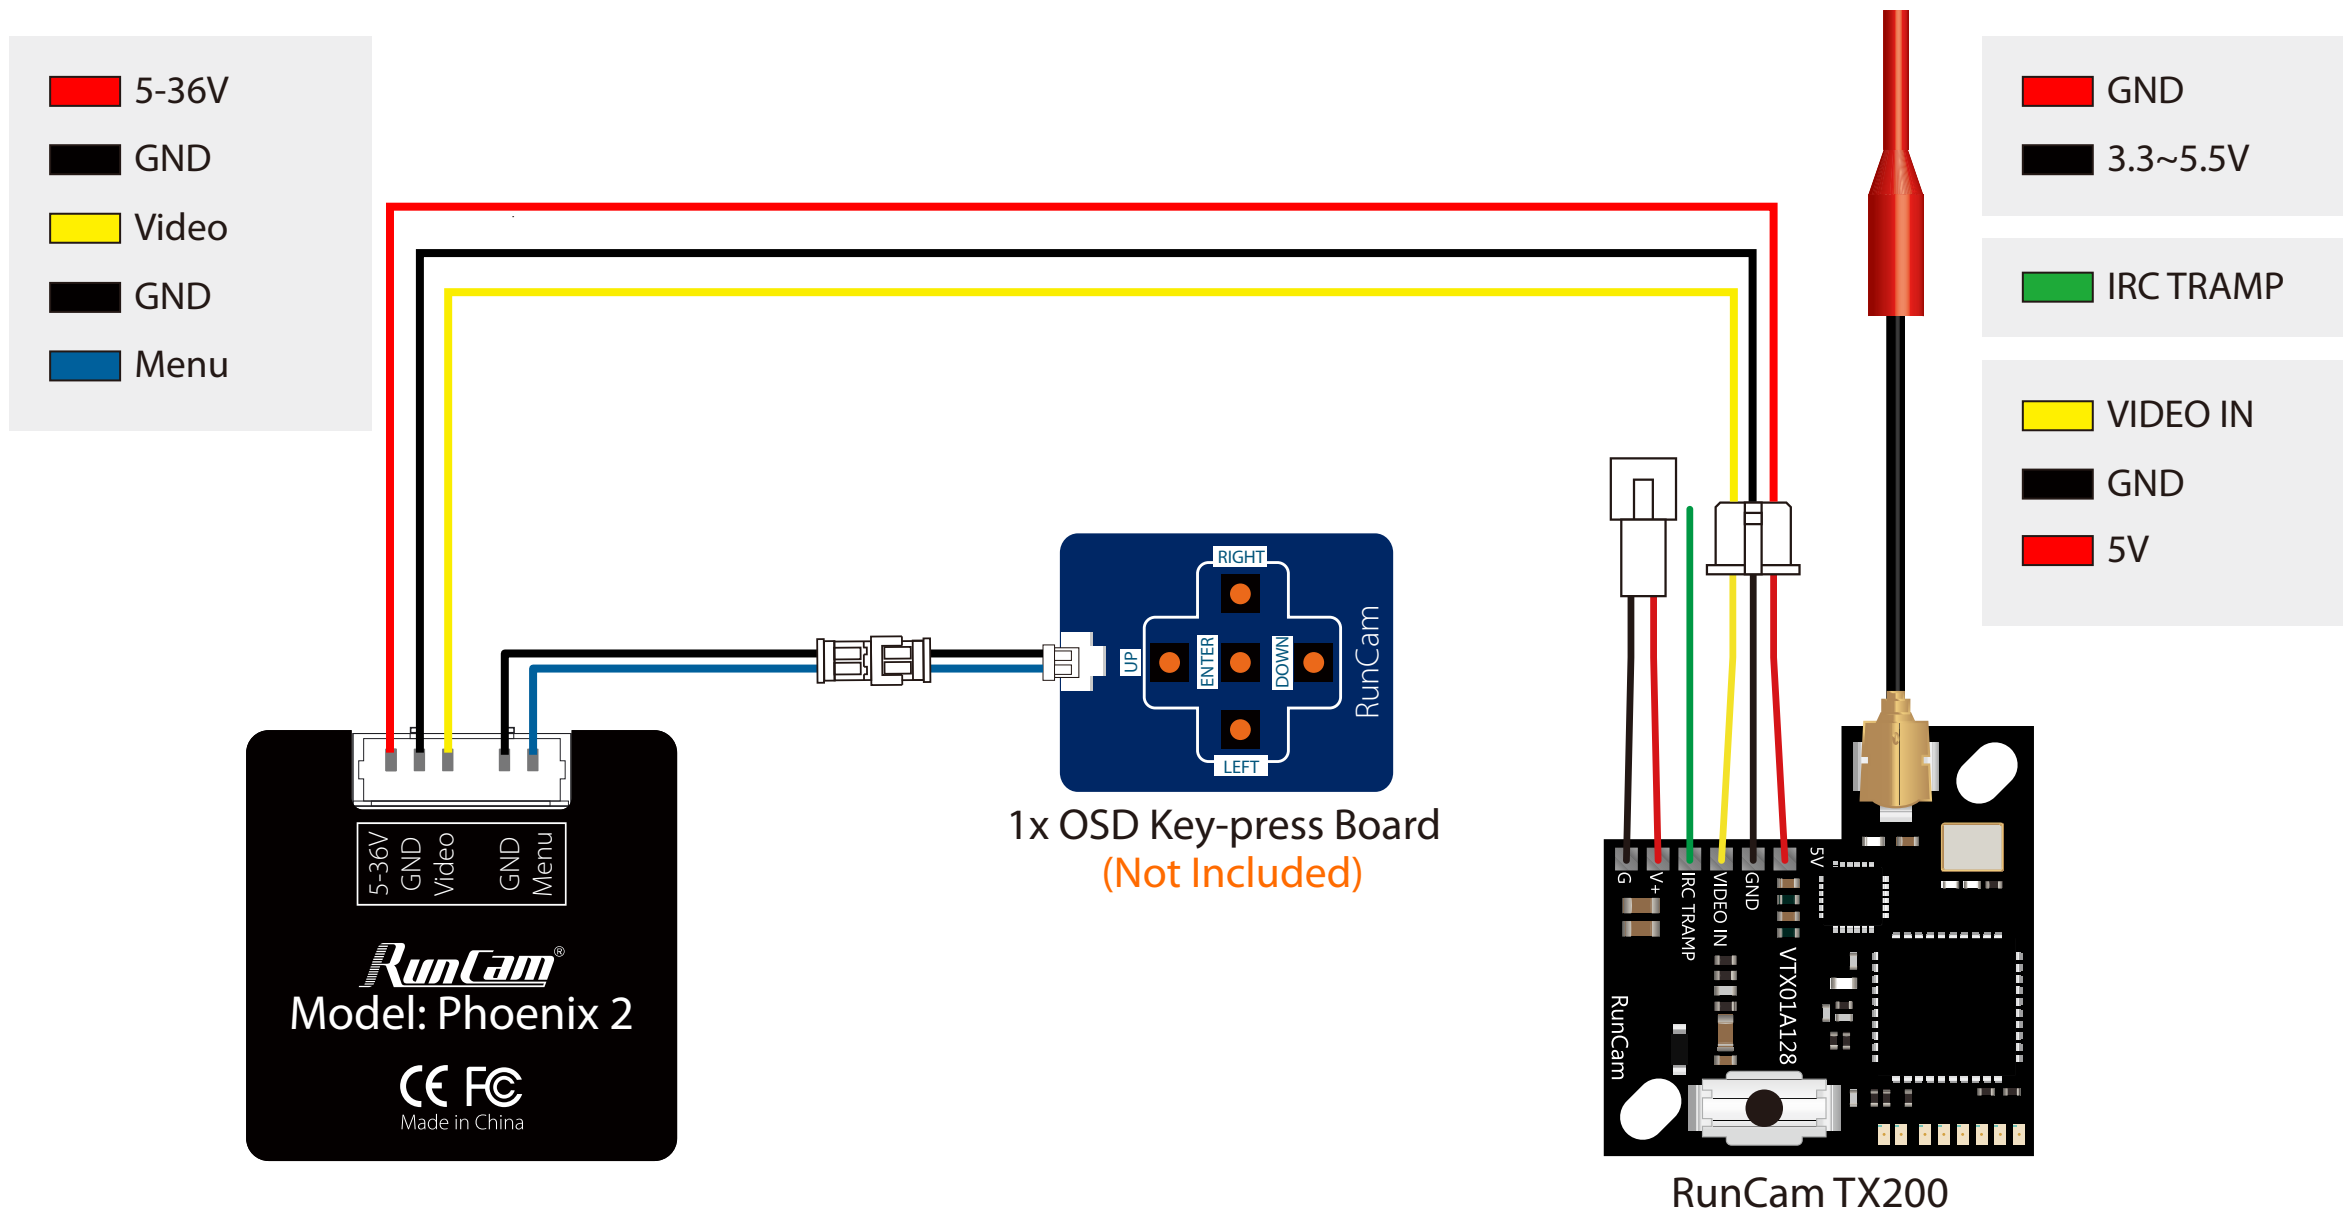

Dimensions & Installation

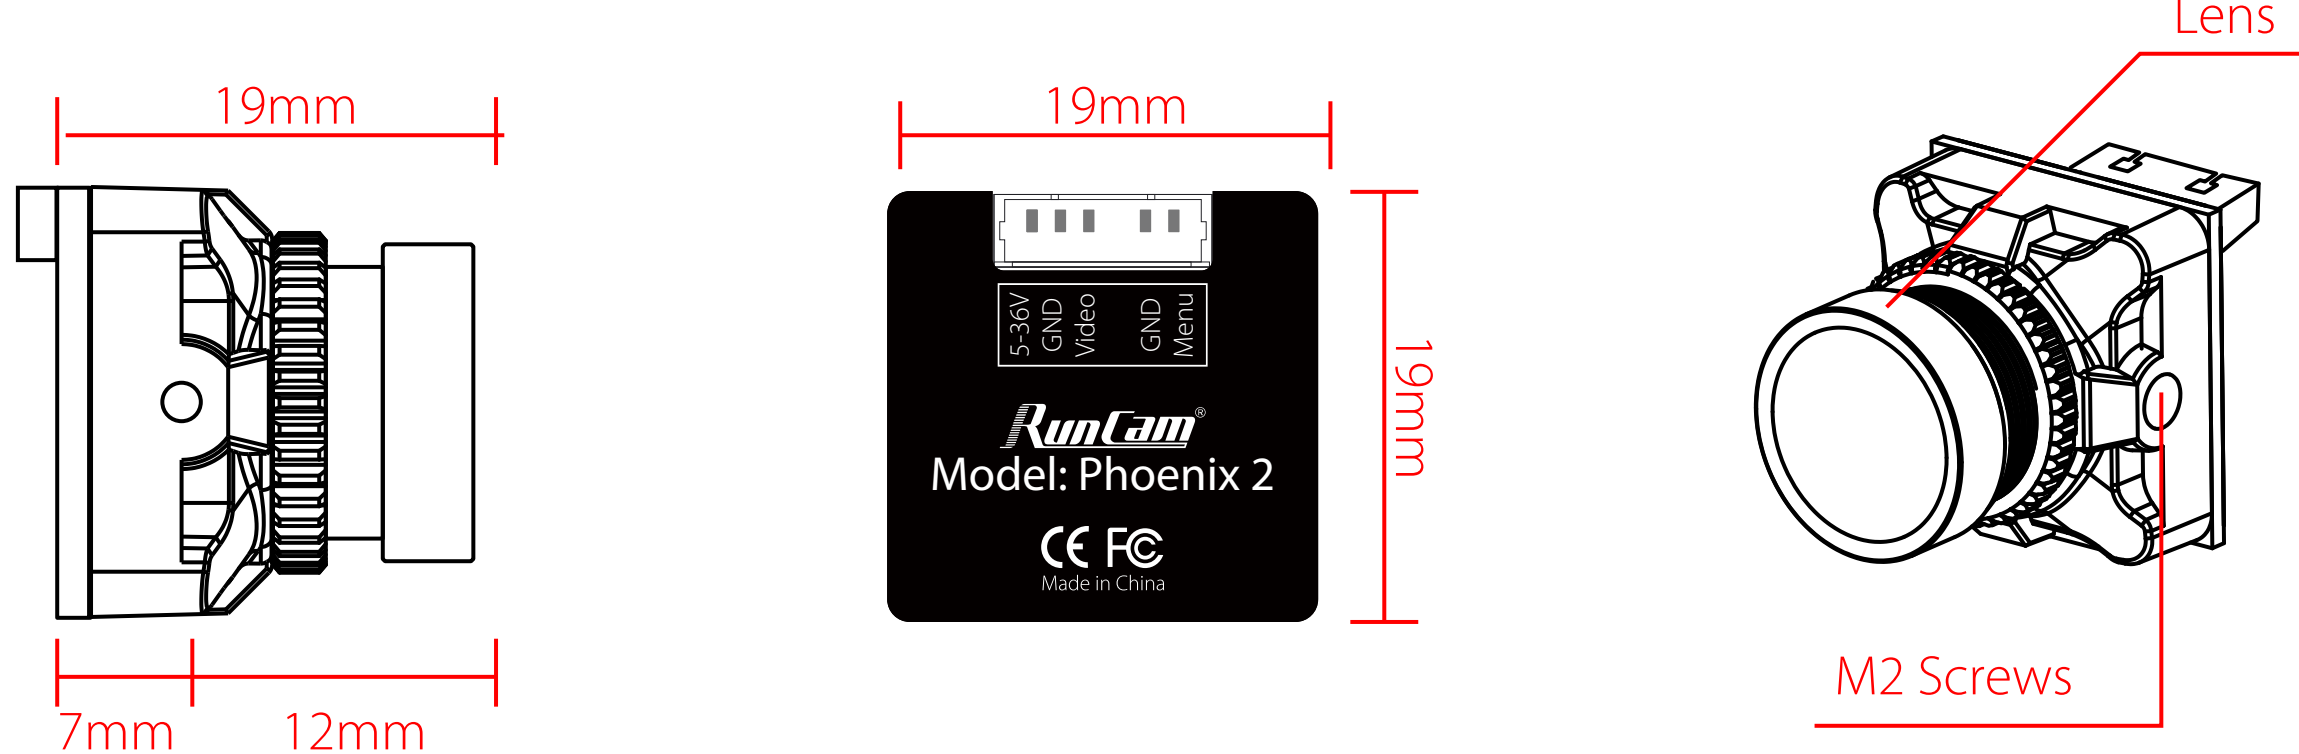

Camera Menu

MAIN MENU	
AE	⬅️
WB	⬅️
DAY NIGHT	⬅️
IMAGE ENHANCE	⬅️
VIDEO SETTING	⬅️
LANGUAGE	⬅️ ENGLISH ➡️
RESET	
SAVE EXIT	
EXIT	

EXPOSURE	
BRIGHTNESS	⬅️ 12 ➡️
EXPOSURE MODE	⬅️ GLOBE ➡️
ADVANCED	⬅️
RETURN	

- EXPOSURE MODE (GLOBE/BLC)

WB	
MODE	⬅️ ATW ➡️
RETURN	

- MODE (ATW/MWB)

DAY NIGHT	
MODE	⬅️ COLOR ➡️
RETURN	

- MODE (COLOR / BW / EXT / AUTO)

VIDEO SETTING	
VIDEO STANDARD	⬅️ NTSC ➡️
HD FORMAT	CVBS
IMAGE RATIO	⬅️ 4:3 ➡️
HORIZONTAL INVERTED	⬅️ CLOSE ➡️
VERTICAL INVERTED	⬅️ CLOSE ➡️
WDR	⬅️ OPEN ➡️
RETURN	

- VIDEO STANDARD (NTSC/PAL)
- IMAGE RATIO (4:3 / 16:9)

IMAGE ENHANCE	
CONTRAST	⬅️ AUTO ➡️
SHARPNESS	⬅️ AUTO ➡️
COLOR GAIN	⬅️ AUTO ➡️
3DNR	⬅️ AUTO ➡️
RETURN	

- CONTRAST (AUTO/MANUAL)
- SHARPNESS (AUTO/MANUAL)
- COLOR GAIN (AUTO/MANUAL)

Parameters

Model	RunCam Phoenix 2	
Image Sensor	1/2" COMS Sensor	
Horizontal Resolution	1000TVL	
Lens	2.1mm (M12) FOV155° (4:3)	
Screen Format	4:3 / 16:9 switchable	
Mirror/Flip	Available	
Signal System	PAL / NTSC Switchable	
S/N Ratio	>50dB (AGC OFF)	
Electronic Shutter Speed	Auto	
Auto Gain Control (AGC)	Auto	
Min. Illumination	0.001Lux@1.2F	
WDR	Global WDR	
Day/Night	Color/BW/EXT/Auto	
Menu Control	Cable Control	
Power	DC 5-36V	
Current	220mA@5V	120mA@12V
Housing Material	ABS	
Net Weight	9g	
Dimensions	19mm*19mm*20mm	