PRODUCT SPECIFICATION

Input voltage	14V to 28V, suggest at least 6S battery
Extra features	Smart audio 3000mW
Power supply	5V Camera @ under 500mA max.
Output power	25/250/500/1000/2000/3000mW
Microphone	Not supported
Antenna connector	MMCX
Cable connector	JST, 6pin
Dimensions	36 (W)x36 (D) mm, 30.5 x 30.5mm (hole)
Weight	23g (excluding antenna)
Kit contents	1x VTX,1x cable, 1x pigtail

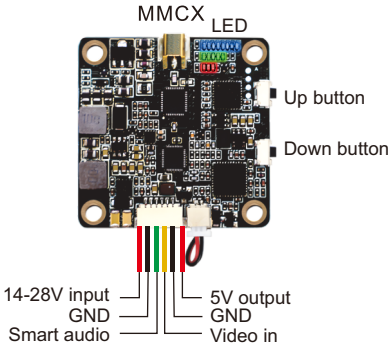

Ultra Long Range

All Channels Version

TX3000AC

PRODUCT SPECIFICATION

Key features

- Support Smart audio
- 25/250/500/1000/2000/3000mW power switchable
- Built-in cooling fan
- OSD configuration using smart audio
- 14-28V input with 5V output

Button control Channel select mode

Up button is used to switch among channel, band and power. Down button is used for setting.

Channel Select
8 Blue leds stands for 8 channels.

Band Select
5 Green leds stands for 10 bands

A	b	E	F	r
●○○○○	○●○○○	○○●○○	○○○●○	○○○○●
P	L	U	O	X
●●○○○	●●●○○	●●●●○	●●●●●	●○○○●

Power Select
3 Red leds stands for 6 power levels

25mW	250mW	500mW	1000mW	2000mW	3000mW
●○○	○●○	○○●	●●○	●●●	●○●

PRODUCT SPECIFICATION

Slow power on
The VTX will wait for 5 seconds before turning on power amplifier. The 5 seconds slow power on will protect the VTX from being burned by maximum instantaneous power.

Pit Mode
The VTX is fully accessible via smart audio.
It supports Pit Mode.

Frequency Table

Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band A	5474	5492	5510	5528	5546	5564	5582	5600
Band b	4990	5020	5050	5080	5110	5140	5170	5200
Band E	5705	5685	5665	5645	5885	5905	5925	5945
Band F	5740	5760	5780	5800	5820	5840	5860	5880
Band r	5658	5695	5732	5769	5806	5843	5880	5917
Band P	5653	5693	5733	5773	5813	5853	5893	5933
Band L	5333	5373	5413	5453	5493	5533	5573	5613
Band U	5325	5348	5366	5384	5402	5420	5438	5456
Band O	5865	5845	5825	5805	5785	5765	5745	5725
Band X	5733	5752	5771	5790	5809	5828	5847	5866

HOT CAUTION
BE CAREFUL NOT TO BURN YOUR FINGERS

PLUG THE ANTENNA BEFORE POWERING THE VTX
DO NOT REMOVE COOLING FAN

128克铜版纸四色印刷折页
126x93mm